


## Mặt bích tiêu chuẩn BS PN16

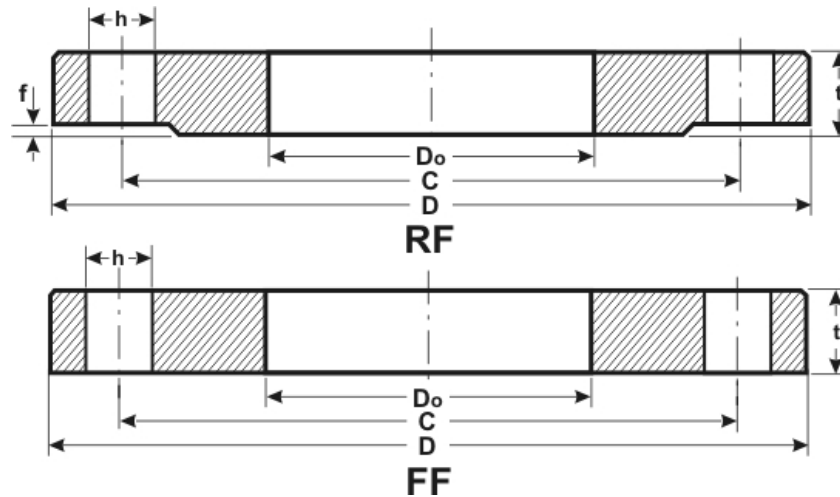

Des. of Goods		Thicknes $s$ $t$ (mm)	Inside Dia. $D_o$ (mm)	Outside Dia. $D$ (mm)	Dia. of Circle $C$ (mm)	Number of Bolt Holes	Hole Dia. $h$ (mm)	Approx. Weig (kg/Pcs)
inch	DN							
1/2	15	14	22	95	65	4	14	0.67
3/4	20	16	27.6	105	75	4	14	0.94
1	25	16	34.4	115	85	4	14	1.11
1.1/4	32	16	43.1	140	100	4	18	1.63
1.1/2	40	16	49	150	110	4	18	1.86
2	50	18	61.1	165	125	4	18	2.46
2.1/2	65	18	77.1	185	145	4	18	2.99
3	80	20	90.3	200	160	8	18	3.61
4	100	20	115.9	220	180	8	18	4
5	125	22	141.6	250	210	8	18	5.42
6	150	22	170.5	285	240	8	22	6.73
8	200	24	221.8	340	295	12	22	9.21
10	250	26	276.2	395	355	12	26	13.35
12	300	28	327.6	445	410	12	26	17.35
14	350	32	372.2	505	470	16	26	23.9
16	400	36	423.7	565	525	16	30	36
20	500	44	513.6	670	650	20	33	66.7
24	600	52	613	780	770	20	36	100.54